


1.0570

S355J2+N

1.0570

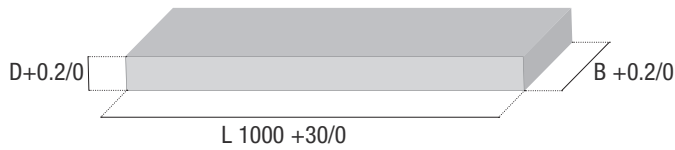

- Dicke präzisionsgeschliffen/ feingefräst
- Breite geschliffen oder gefräst
- Länge bearbeitet

## Präzisionsflachstahl mit Bearbeitungsaufmass

Lagerlänge 1000 mm

Dicke mm Breite mm	Dicke mm														
	5.2	6.2	8.2	10.4	12.4	15.4	20.4	25.4	30.4	40.4	50.4	60.4	70.4	80.4	100.4
20.3		20	22	23	25	26	-								
25.3	22	22	23	25	28	31	37								
30.3	23	23	26	28	33	37	44	50							
40.3	25	26	31	36	39	44	50	56	63						
50.3	30	33	36	42	45	48	57	64	76	83					
60.3	36	39	44	44	47	51	64	72	85	92	103				
70.3				51	57	66	73	82	94	97	126	139			
80.3	45	48	51	57	66	73	85	94	96	107	133	154	176		
100.3	54	57	61	67	82	85	100	97	117	140	165	173	196	227	
120.3			72	80	94	97	106	114	133	162	173	202	225	266	302
125.3	60	69	75	86	98	100	113	119	144	173	179	200		272	314
140.3			95	96	106	114	132	140	159	173	199	227	265	307	339
150.3	75	85	98	99	111	122	133	147	165	182	207	247	279	293	360
160.3	83	97	97	107	119	128	140	151	177	190	223		295	298	381
180.3				118	126	134	147	159	175	213	243	282	296	337	
200.3		106	119	130	134	145	162	177	199	228	269	307	325	384	460
250.3		125	144	151	167	166	179	200	231	279	304	350	395	453	529
300.3				177	178	196	210	238	269	302	354	302	453	502	644
350.3				207	224	243	269	291	318	337	430	453		611	731
400.3				239	251	269	288	310	308	380	458	513			
500.3				250	269	288	314	314	378	458	557	644			

## Vierkantstähle

Lagerlänge 1000 mm

10.4	12.4	15.4	20.4	25.4	30.4	40.4	50.4	60.4	70.4	80.4	100.4	120.4	150.4
26	30	31	33	47	60	76	99	132	158	187	282	354	526